



CONDATO GRANDE

Condato Grande is our public lift that displays pure craftsmanship and ingenuity. It has a strong load capacity of 1000 kg and comes with a modern Scandinavian design that makes it fit to any kind of environment. Condato Grande has 55 different platform sizes to choose from and a shaft pit of only 110 mm which makes it easy to install in any type of building.


Platform Sizes

Width:
1000-1400 mm
Depth:
1500-2500 mm



1100 mm x 2200 mm (Standard)
1400 mm x 2000 mm (Standard)
1400 mm x 2500 mm (Standard)

Standard



RAL 9003

Lift Shaft Color

Option



5014



8022



1036



7011

Option



6034



7003




3004



1001


(Choose between 198 different RAL Colors)

Lift Dimensions

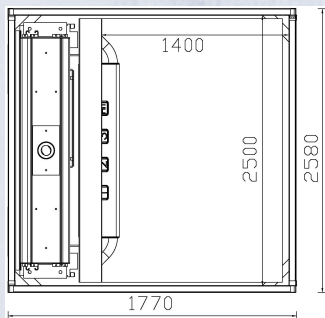

1770 x 2580 mm


Standard



0702

(Black Rubber)


Option 1



6172

(Choose between 20 different colors)

2









0733

3



6173

| | | | | |
|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| RECOMMENDED INSTALLATION Indoors and outdoors |  DRIVE SYSTEM Screw and nut | PLATFORM BUTTONS Automatic Run All buttons with tactile and braille | BATTERY EMERGENCY LOWERING incl. as standard | MOTOR 4 kW |
|  RATED LOAD 1000 kg | | CERTIFICATION MD 2006 / 42 / EC | PIT DEPTH 110 mm | |
| HEIGHT LIMITS Max travel height 15 meter Top height 2,3 mm | CONTROL SYSTEM PLC |  STANDARD EPS PANEL |  POWER SUPPLY 380-400V 3-phase 50/60 Hz 16A, frequency converter | |
| STOPS Max 5 stops  |  DOOR BUTTONS One touch | | | |
| | | RATED SPEED Max 0,15 m/sec | MANUFACTURED IN SWEDEN | |

STANDARD & OPTIONS

Door Handle, 30 cm



Black painted (Standard)

Stainless steel (Option)

Automatic Door Opener (Option)




Floor Indicator (Option)



Digital display that indicates which floor the lift is currently standing on.

Ramp (Option)



If the lift is installed without a pit, a ramp is required according to the EN81.41.

2-Way Communication System (Option)



All Condato lifts **except Condato Mini** are able to install a 2-way communication system which allows access from inside and outside the lift in case of emergency.


Glass Types



4+4+0,75 mm tempered and laminated safety glass. Select between 4 different types.


- Clear
- Tinted
- Frosted
- Dark Tinted

Door and Window Frame Colors

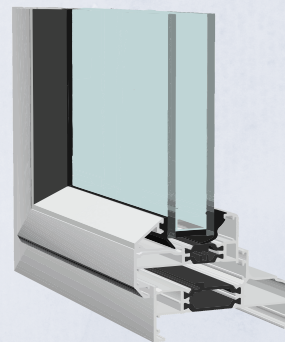

Aluminium Color (Standard)
198 Different RAL Colors (Option)

Side Plate Panel Colors

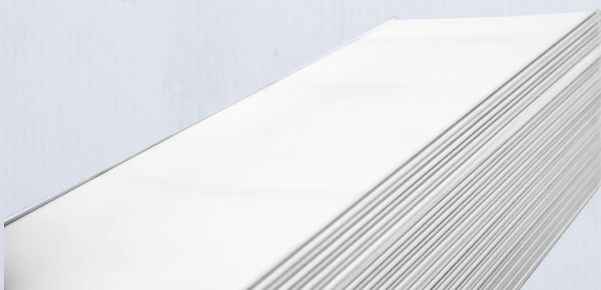

RAL 9003 (Standard)
199 Different RAL Colors (Option)

Half Door - Top Floor (Option)

