

CONDATO PRIME



Condato Prime is what we call the perfect combination between economy and high quality. It has a load capacity of 500 kg and a total of 30 different platform sizes to choose of which makes it suitable for any type of home. Condato Prime is like the rest of our lift models, based on the screw and nut technology. This means it is easy to install, it runs silently and with low energy costs.

Lift Shaft Color


Platform Sizes

Width:
700-1100 mm
Depth:
1100-1600 mm



1000 mm x 1500 mm (Standard)
1100 mm x 1500 mm (Standard)
1100 mm x 1600 mm (Standard)

Standard



RAL 9003

Option



5014



8022



1036



7011

Option



6034



7003




3004



1001


(Choose between 198 different RAL Colors)

Lift Dimensions



1470 x 1680 mm


Standard



O702

(Black Rubber)


Option 1



6172

(Choose between 20 different colors)

2









O733

3



6173

RECOMMENDED INSTALLATION Indoors and outdoors	 DRIVE SYSTEM Screw and nut	PLATFORM BUTTONS Automatic Run All buttons with tactile and braille	BATTERY EMERGENCY LOWERING incl. as standard	MOTOR 2.2 kW
 RATED LOAD 500 kg		CERTIFICATION MD 2006 / 42 / EC	PIT DEPTH 50 mm	
HEIGHT LIMITS Max travel height 15 meter Top height 2,3 mm	CONTROL SYSTEM PLC	 STANDARD EPS PANEL	 POWER SUPPLY 220-380V 1 or 3-phase 50/60 Hz 16A, frequency converter	
STOPS Max 5 stops 	 DOOR BUTTONS One touch			
		RATED SPEED Max 0,15 m/sec	MANUFACTURED IN SWEDEN	

STANDARD & OPTIONS

Door Handle, 30 cm



Black painted (Standard)

Stainless steel (Option)

Automatic Door Opener (Option)




Floor Indicator (Option)



Digital display that indicates which floor the lift is currently standing on.

Ramp (Option)



If the lift is installed without a pit, a ramp is required according to the EN81.41.

2-Way Communication System (Option)



All Condato lifts **except Condato Mini** are able to install a 2-way communication system which allows access from inside and outside the lift in case of emergency.


Glass Types



4+4+0,75 mm tempered and laminated safety glass. Select between 4 different types.


- Clear
- Tinted
- Frosted
- Dark Tinted

Door and Window Frame Colors



Aluminium Color (Standard)
199 Different RAL Colors (Option)

Side Plate Panel Colors

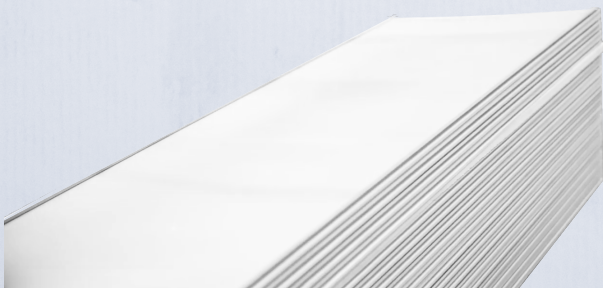

RAL 9003 (Standard)
199 Different RAL Colors (Option)

Half Door - Top Floor (Option)

