




CONDATO MINI


Condato Mini is our smallest and most cost effective lift. Mini with its compact platform size 700x1100 is suitable for small areas, either as built in or stand alone. With a maximum travel height of 15 meter and a load capacity of 500 kg, Mini can cover the needs for most 2-4 floor buildings where space is an issue. Condato Mini is equipped with a standard mirror above the user panel.

Platform Size



700 x 1100 mm (Standard)

Standard



RAL 9003

Lift Shaft Color

Option



5014



8022



1036



7011

Option



6034



7003




3004



1001


(Choose between 199 different RAL Colors)

Lift Dimensions



1070 x 1180 mm


Standard



O702

(Black Rubber)


Option 1



6172


(Choose between 20 different colors)

2









0733

3



6173

RECOMMENDED INSTALLATION Indoors and outdoors	 DRIVE SYSTEM Screw and nut	PLATFORM BUTTONS Automatic Run All buttons with tactile and braille	BATTERY EMERGENCY LOWERING incl. as standard	MOTOR 2.2 kW
 RATED LOAD 500 kg		CERTIFICATION MD 2006 / 42 / EC	PIT DEPTH 50 mm	
HEIGHT LIMITS Max travel height 15 meter Top height 2,3 mm	CONTROL SYSTEM PLC	 STANDARD EPS PANEL	 POWER SUPPLY 220-V 1-phase 50/60 Hz 16A, frequency converter	
STOPS Max 5 stops 	 DOOR BUTTONS One touch			
		RATED SPEED Max 0,15 m/sec	MANUFACTURED IN SWEDEN	

STANDARD & OPTIONS

Door Handle, 30 cm



Black painted (Standard)

Stainless steel (Option)

Automatic Door Opener (Option)




Floor Indicator (Option)



Digital display that indicates which floor the lift is currently standing on.

Ramp (Option)



If the lift is installed without a pit, a ramp is required according to the EN81.41.

2-Way Communication System (Option)



All Condato lifts **except Condato Mini** are able to install a 2-way communication system which allows access from inside and outside the lift in case of emergency.


Glass Types



4+4+0,75 mm tempered and laminated safety glass. Select between 4 different types.


- Clear
- Tinted
- Frosted
- Dark Tinted

Door and Window Frame Colors



Aluminium Color (Standard)
199 Different RAL Colors (Option)

Side Plate Panel Colors

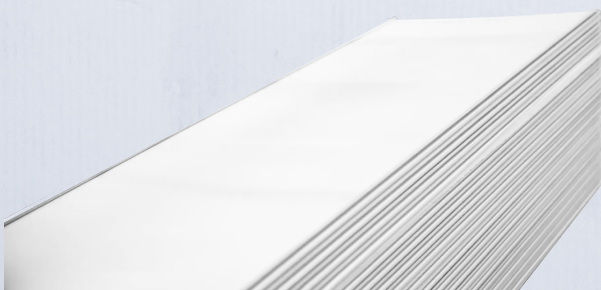

RAL 9003 (Standard)
199 Different RAL Colors (Option)

Half Door - Top Floor (Option)

